




# Nástenná vnútorná jednotka AEHI | AERI | AENI

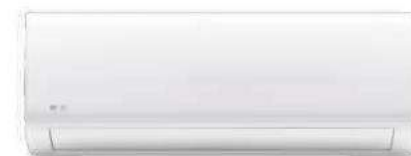

Model	ACP-07CH21AENI/I	ACP-09CH25AERI/I+	ACP-12CH35AERI/I+	ACP-18CH50AERI/I+	ACP-09CH25AEHI/I+	ACP-12CH35AEHI/I+	ACP-18CH50AEHI/I+
<b>Vnútorná jednotka</b>							
<b>Kapacita (W)</b>	2052	2638	3517	5275	2638	3517	5275
<b>Prevádzkový rozsah chladenia</b>	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C	-15 °C ≤ T ≤ 50 °C
<b>Kapacita (W)</b>	2346	2931	3810	5568	2931	3810	5568
<b>Prevádzkový rozsah vykurovania</b>	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C	-20 °C ≤ T ≤ 24 °C
<b>Prietok vzduchu (m³ / h) – HI / MID / LOW</b>	520 / 460 / 340	483 / 362 / 303	584 / 477 / 395	730 / 500 / 420	700 / 515 / 425	700 / 515 / 425	750 / 530 / 430
<b>Chladivo</b>	R32	R32	R32	R32	R32	R32	R32
<b>Kapacita odvlhčovania (L / h)</b>	1,0	1,0	1,2	1,8	1	1,2	1,8
<b>Hluk – Akustický tlak (dB (A)) – HI / MID / LOW / SI</b>	40 / 30 / 26 / 21	36,5 / 29 / 24 / 20	39,5 / 33 / 25 / 21	43 / 33,5 / 28 / 23	40 / 32,5 / 21,5	40 / 32,5 / 21,5 / 19	41,5 / 36,5 / 33,5 / 19
<b>Hlasitosť za štandardných podmienok (dB)</b>	≤ 54	≤ 55	≤ 55	≤ 57	≤ 53	≤ 53	≤ 54
<b>Rozmery balenia (mm)</b>	870 x 270 x 360	875 x 285 x 380	875 x 285 x 380	1045 x 305 x 410	1005 x 295 x 385	1005 x 295 x 385	1005 x 295 x 385
<b>Rozmery zariadenia (mm)</b>	805 x 194 x 285	802 x 189 x 297	802 x 189 x 297	965 x 215 x 319	920 x 211 x 321	920 x 211 x 321	920 x 211 x 321
<b>Brutto / netto váha (kg)</b>	9,5 / 7,5	11,1 / 8,6	11,1 / 8,6	14,2 / 10,9	11,3 / 14,2	11,3 / 14,2	11,5 / 14,4
<b>Pripojenie</b>							
<b>Priemer potrubia v kvapalnej fáze</b>	1 / 4"	1 / 4"	1 / 4"	1 / 4"	1 / 4"	1 / 4"	1 / 4"
<b>Priemer potrubia v plynnej fáze</b>	3 / 8"	3 / 8"	3 / 8"	1 / 2"	3 / 8"	3 / 8"	1 / 2"
<b>Prepojovací kábel</b>							
<b>Pripojenie (mm²)</b>	4 x 1,5	4 x 1,5	4 x 1,5	4 x 1,5	4 x 1,5	4 x 1,5	4 x 1,5
<b>Zdroj</b>	~220-240 V / 1 / 50 Hz; Vonkajšia jednotka						